

## MT-300..


### Earthing equipment for third rail

#### Application:

- Earthing equipment for third-rail systems (subway, LRT).
- For high levels of short-circuit current.

#### Features:

- Earthing device according to IEC 61230.
- Nominal voltage: up to 750 V DC.
- High quality insulating tubes (IEC 60855-1).
- Aluminium jaws on both sides to ensure optimum contact on third rail and running rail.
- 2 copper cables with silicon sheath.
- Handling articulated lever.
- Brass interchangeable parts for contact to the running rail and to the third rail.
- Magnets on each side for easiness of mounting.
- Adjusting screw for strong and secure tightening of the system.
- Weight: 10 kg

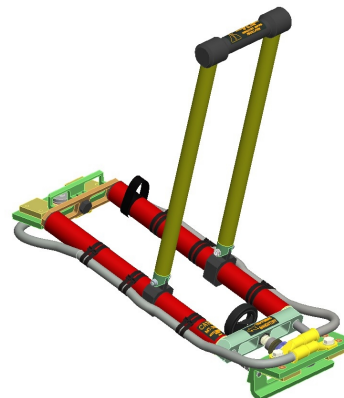

Référence	Dimensions	
	Length (mm)	Weight (kg)
MT-300/10	-	-
MT-30040	805	10
MT-30070	930	11