

## Z-VAT-DC / CL-6


Network Type : MV-LV

Bipolar DC voltage detector 120-2 200 V DC. Ø8 mm contact points. Cable 1 m.

### Application:

System for checking the absence of voltage on a network supplied with direct current from 120 V to 2,200 V:

- Presence of voltage indicated by the lighting up of 6 red LEDs and the emission of an audible signal.
- Function control of the integrated device which validates all detector functions. :
  1. Contact the handle's magnetic shoe with the rail and shunt the assembly by making contact between the magnetic handle and the contact hook;
  2. Press the test button: 6 red LEDs light up, audible signal sounds;
  3. Release the test button: momentary illumination of the 6 green LEDs.

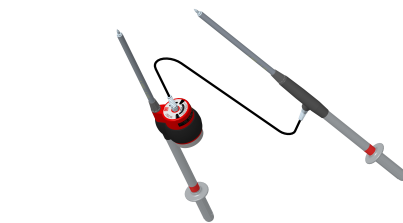

### Features:

This system consists of :

- Audible and luminous 120-2 200 V DC voltage detector with hand-held pole;
- 2 electrodes with 8 mm diameter contact points;
- Stick with handguard for the electrode;
- 1 m connecting cable;
- Suitcase.



Référence	Weight (kg)
Z-VAT-DC-120/2200-PS	4,200