

M-24-...


Vinyl sheathed copper cable for MALT/CC

Application :

- Earthing and short-circuiting cables.

Features :

- Material : Copper with insulating sheath in extra flexible PVC ST11 grade.
- Transparent insulating sheath.
- Minimum bending radius: 4 times the cable diameter.
- Operating temperatures: -40°C to +60°C.
- Standard marking every 500 mm.
- Delivered by 5 m min.

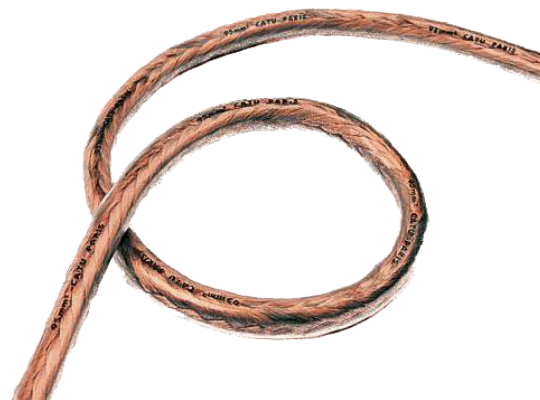

Ref	ICC (kA/1s)	Material
M-24-120	34	Cuivre
M-24-150	42,5	Cuivre
M-24-16	4,5	Cuivre
M-24-25	7	Cuivre
M-24-35	10	Cuivre
M-24-50	14	Cuivre
M-24-70	20	Cuivre
M-24-95	27	Cuivre