

## Z-VAT-DC / CL-6

Network Type : MV-LV

Bipolar DC voltage detector 120-2200 V. Ø8 mm contact points. Cable 1 m.

### Application:

System for checking the absence of voltage on a network supplied with direct current from 120 V to 2,200 V:


- Presence of voltage indicated by the lighting up of 6 red LEDs and the emission of an audible signal.
- Function control of the integrated device which validates all detector functions. :
  1. Contact the handle's magnetic shoe with the rail and shunt the assembly by making contact between the magnetic handle and the contact hook;
  2. Press the test button: 6 red LEDs light up, audible signal sounds;
  3. Release the test button: momentary illumination of the 6 green LEDs.



### Features:

This system consists of :

- Audible and luminous 120-2 200 V DC voltage detector with stick and handguard;
- 8 mm diameter contact point electrode;
- Rail contact clamp;
- 5 m connecting cable;
- Suitcase.

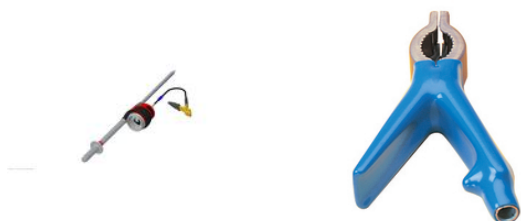

Référence

Z-VAT-DC-120/2200-S

Weight (kg)

3,800